


# KLIS IPCAM-5M-NOBv2

IR Bullet, 3G IR LED, built-in POE, 2.8-12mm Motorized Lens

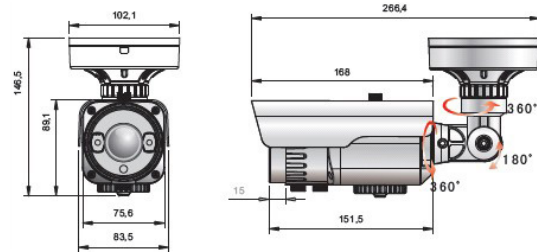

Camera Model	
Image Sensor	Sony IMX335
DSP	Hi3516AV300, Cortex A7@900MH
Effect Pixel	2592(H)x1944(V)
Scan Mode	Line by line Scan
Electronic shutter	1/25s~1/10000s; Automatic Adjustment
Min Illumination	Color <a href="#">0.01Lux@F1.2</a> (AGC ON); 0Lux when IR on
S/N Ratio	≥50dB (AGC OFF)
Day and night switch mode	ICR, Auto / External / Manual / Fixed time control
WDR	> 100dB WDR
Digital Noise Reduction	3 DNR
Video Parameters	
Video compression	H.265+/ H.265/ H264
Video resolution	Main stream 2592*1944/ 2560*1920/ 2160*1620/ 1920*1440@50fps Sub stream 704*576/640*480 @25fps
Video Bit rate	32Kbps-16Mbps
Image settings	Supports Brightness, Contrast, Saturation, Sharpness, White Balance; AWB, AGC, AE (Automatic Exposure Control); Supports privacy area occlusion; OSD overlay; Image rotation: Normal 90 ° / 270 °; Defog
Peripheral Interface	
Audio / Talkback input	1 CH audio MIC input / linear input
Audio Output	1 CH audio output
POE	Built-in POE
Network Parameters	
Network Interface	10M/100M adaptive Ethernet port
Network Protocol	TCP/IP, UDP, RTP, RTSP, RTCP, DNS, DDNS, DHCP, FTP, NTP, PPPOE, UPNP, Websocket, HTTP, SSL, GB2818

Access Standard	Support the latest ONVIF2.42 / GB28181 / SDK
Number of Client Visits	Support 8 users login at the same time
APP	iPhone, iPad, Android
<b>General Parameters</b>	
Waterproof rate	IP66
Lens	2.8-12mm Motorized Lens
IR LED	3pcs 3G IR LED
IR range	40M
Power Supply	DC 12V
Power consumption	7.2W(MAX)
Size	84mm(W)x89mm(H)x168mm(L)
Operation temperature	-20°C~50°C



**Euklis s.r.l.**

Via C. Colombo, 23 - 20090 Trezzano s/N (MI)

Tel. (+39) 02.48.40.92.67 - Fax (+39) 02.48.40.92.66 - [www.euklis.it](http://www.euklis.it)